

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 047 207 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

25.10.2000 Bulletin 2000/43

(51) Int. Cl.<sup>7</sup>: H04B 7/005

(21) Application number: 00303346.1

(22) Date of filing: 20.04.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 22.04.1999 US 296974

(71) Applicant:

Nortel Networks Limited  
Montreal, Quebec H2Y 3Y4 (CA)

(72) Inventors:

- Chheda, Ashvin  
Dallas, Texas 75252 (US)
- Jalali, Ahmad  
San Diego, California 92191 (US)


(74) Representative:

Dearling, Bruce Clive et al  
Hepworth Lawrence Bryer & Bizley,  
Merlin House,  
Falconry Court,  
Bakers Lane  
Epping, Essex CM16 5DQ (GB)

## (54) Fast forward power control during soft handoff

(57) Disclosed is an apparatus for and method of increasing the stability of a CDMA cellular system using fast forward power control. This is accomplished by improving the relative power level synchronization of all the BTSs communicating with an MS in a handoff mode through the use of at least one of 1) setting the power levels of any BTS other than the BTS having the best measured  $E_b/N_0$  (bit energy to noise density) of reverse link FPC (forward power control) bit stream transmissions from said MS, hereinafter BTS(x), to a power level which is a function of the power level of BTS(x), 2) adjusting at least one of lower and upper limits of traffic channel gain of a BTS as a function of whether or not said given MS is in a handoff mode and 3) adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

FIG. 2

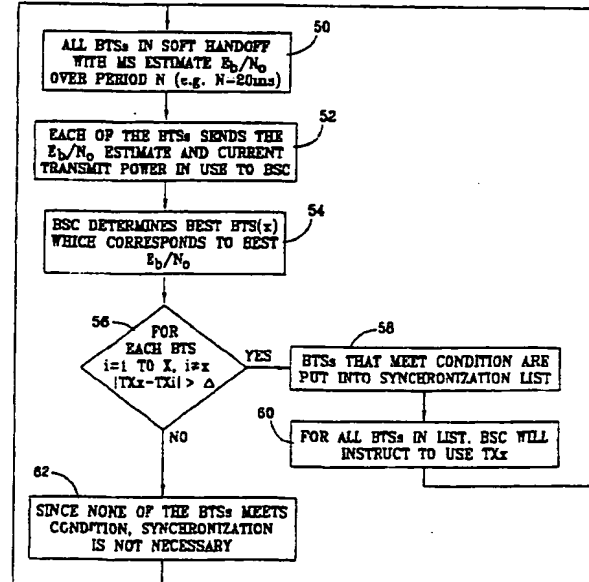

EP 1 047 207 A2

## Description

### TECHNICAL FIELD

[0001] The present invention relates in general to wireless communication systems and in particular to an efficient method of and apparatus for improving the implementation of fast forward power control during soft handoff.

### BACKGROUND

[0002] In a CDMA (code division multiple access) cellular system complying with an industry standard specification as set forth in IS-95A, the repetition rate of the forward link power control signals is slow, on the order of 50Hz. The MS (mobile station) reports the status of the forward link frames to the SBS (selector bank subsystem) of a BSC (base station controller) via the entire set of BTSs (base station transceiver subsystems) in soft handoff with the MS. Based on the frame quality, the power control algorithm, as implemented by the SBS, determines the new transmit power levels for all the BTSs in soft handoff with the MS. The SBS relays the new transmit power levels to the BTSs. Hence, the power level used by each BTS in soft handoff with the MS is always equal. That is, the forward link power allocated to the MS at each of the BTSs is always synchronized to the same power level.

[0003] When a forward link frame is transmitted to the MS from the BTSs, it takes a finite amount of time before the MS receives it. If a communication mode designated as Rate Set 2 is employed, then the MS encodes an EIB (Erasure Indicator Bit) into the next outgoing reverse link frame, signifying the status of the forward link frame. After additional propagation delays, each BTS in soft handoff with the MS relays the demodulated reverse link frame and associated frame quality metrics to the SBS. The SBS then updates the forward transmit power levels of the forward link based on the EIB and instructs the BTSs to use the new level. Therefore, the time between the transmission of a forward link frame and the corresponding increase/decrease in transmit power is a constant delay. The delay is based upon the architecture (propagation/processing delays of the various interconnecting blocks) of the system. In rate set 1, on the other hand, the power control is accomplished through the use of the reverse link "Power Measurement Report Message" (PMRM), which is triggered by a count of the number of bad forward link frames.

[0004] The fact that the power control process is slow implies that under certain channel conditions, specifically low speed movement of the MS and single multipath environments where long deep fades are expected, a high average forward transmit power is required to meet a given GOS (grade of service).

[0005] An evolution of CDMA, popularly designated

as 3G (third generation), includes a fast forward link power control scheme wherein the MS determines whether or not it requires more forward link power to maintain the GOS. The decision is transmitted rapidly to the BTSs via a reverse link dedicated control channel.

[0006] With the introduction of fast forward link power control, there was the expectation that forward link capacity would increase by large amounts at low mobile velocities. However, all the published analyses, known to the present inventors, carried out to characterize the actual capacity gain have failed to consider the performance of the algorithm during soft handoff. The term "soft handoff" throughout the remainder of this document is intended to define the situation where an MS is in communication with two or more BTSs preparatory to the potential of being transferred from one cell to another. The independence of the reverse links during soft handoff, in terms of slow/fast fading and distance/antenna related path losses to the mobile, result in different raw bit error rates. Individual BTSs that are in soft handoff, rapidly control their transmit power based on the forward power control bits they demodulate from the reverse link. This may, and often does, result in a deviation in instantaneous transmit power at the different BTSs. Depending on the degree of soft handoff, the average path loss difference between mobile and BTSs, and the power control parameters used, the resulting required forward link transmit power for a user may be quite high due to this mismatch. This translates to capacity degradation.

[0007] The main conclusion that may be drawn from the above, is that, to understand the practical effects of fast forward power control on capacity, one must consider the fact that an MS may be in a soft handoff mode for a significant amount of time. During this time, there is substantial opportunity for the transmission power levels of the different BTSs in soft handoff with the MS to become substantially non-synchronized. Additionally, one or more soft handoff forward links may be inadequately controlled due to poor reverse links. Such a situation detrimentally affects the potential capacity of such a system.

[0008] CDMA systems using fast forward link power control will be appreciated by the skilled addressee.

[0009] To realize the fast forward power control technique, the MS estimates the SNR (signal to noise ratio) per power control group after maximally ratio combining the received signal energy per multipath. The estimation is compared to a threshold and, based on the comparison, a power control, up or down, command is generated. The MS adjusts this SNR threshold every frame, or at 50Hz, based on the quality of forward link frames. Each time a forward link frame is received in error, the threshold is increased. This represents situations where the SNR may be insufficient for the current mobility conditions. If the forward link frame is good, the SNR threshold is reduced. This is based on the assumption that the SNR is sufficient for the given GOS

levels. The increase and decrease of the threshold are related by a FER (frame error rate) requirement. The up/down decisions are the control mechanism that ensures that the received SNR or the forward link is equal to the threshold.

**[0010]** During soft handoff, the different BTSs, of a 3G fast power control system, must now independently demodulate the MS power control decisions. Based on the demodulated decision, the BTS will increase/decrease its transmitted power. It is quite likely that the reverse links between the MS and the different BTSs will have different instantaneous power control bit error rates. Consequently, the actual decision that each BTS makes may not be the same. In other words, some BTSs may demodulate the power control bit decision in error. With the existing prior art network architecture, the BSC cannot synchronize the BTSs to the same power level after each power control decision because of the inherent processing and queuing delay of the central processing unit and interconnecting communication links. If the reverse links from MS to BTSs were error free, then the transmitted power at each BTS per power control group time segment would be equal and perfectly synchronized. However, as mentioned above, each BTS to MS reverse link is likely to have a different instantaneous error rate due to the independent slow/fast fading, and different distance/antenna related path losses. Thus, if each link has a different error rate, then the actual transmitted powers from each BTS to MS during soft handoff deviate. This may result in loss of diversity. This is further explained via a possible scenario discussed below.

**[0011]** It may be assumed that the MS is in two-way soft handoff with the network. If the BTSs could be perfectly synchronized, then they would power up/down together. Hence, the diversity gain is optimized; when one path fades, the other is used and the reverse scenario also holds. In practice, even when the BTSs start out at the same level transmitted power level, due to different power control bit error rates per reverse link, their transmit power levels and up/down decisions are no longer perfectly synchronized. Typically, one reverse link will have a much higher FER and BER (raw bit error rate) than the other reverse link. If the MS requires lower forward power, then one BTS will power down quickly and appropriately, while the other may well remain at the same power level (if the raw BER is 50%), or power down at a much slower rate. Stability is usually maintained in such cases. Stability, for the purposes of this document, means that the FER requirements are maintained and the call drop rates are not increased. Since one BTS is not powering down, the other will power down to a lower level than it would if both links were adequately controlled. This ensures that just enough signal energy is provided to maintain GOS.

**[0012]** However, the converse is equally probable. Once the forward link is insufficient to meet a given GOS, only the BTS with the more accurate reverse link

will be able to react faster and more accurately by increasing its transmit power. Therefore, the resulting BTSs power levels are likely to be significantly different. The diversity gain is affected as a function of the difference between these levels. In other words, the forward link associated with the weaker reverse link is unable to provide diversity gain due to its inability to increase its transmit power. Thus, the overall requirement on power is higher in order for the adequately power controlled link to make up for the loss of diversity. Even if the weaker reverse link improves, the BTSs remain out of synch by an indeterminate factor as they adjust their powers up or down. If the other reverse link corrupts, the mismatch may increase or narrow.

**[0013]** It is important to keep in mind that while the higher reverse bit error rate on one link causes the traffic channel transmit power from one BTS to be much lower, the MAI (multiple access interference) that the BTS contributes at the MS receiver may still be high since, for the purposes of this discussion, it is assumed that the MS is in a soft handoff region. Thus the benefits of diversity cannot be realized. The overall effect is a reduction in system capacity. In fact, as the order of soft handoff goes up, this effect is more noticeable. Therefore, the soft handoff gain/benefit is compromised.

**[0014]** It may be noted that even if the MS were in a high order soft handoff and each link had independent 5% error rates, the traffic performance would still remain stable. This is because the forward powers of each BTS would not gravitate far apart. The problem is due to the fact that the error rates are "bursty". By the term "bursty", we mean that there are spurts of reverse link power control bit errors. Even though the overall reverse power control bit error rates are at 5%, one reverse link rate may have a power control bit error rate as low as a fraction of a percent, but occasionally go through error rate periods on the order of 20% to 30%. This causes the forward link power levels to significantly drift apart at each BTS, thereby resulting in a loss of diversity.

**[0015]** Finally, the overall power control coupling between forward and reverse link needs to be considered. If the MS is in a higher order soft handoff, and there is a poor forward link quality from a number of BTSs, the MS is more likely to make wrong reverse link power control decisions, and its general trend is to power down (lower the output transmitted power). This will in turn affect the power control bit rate and forward link frame quality, which further degrades the reverse link power control process. Eventually all forward link power control bits carried on all the reverse links may thus be in error.

**[0016]** It would thus be desirable to find a way to improve the reverse link reliability during soft handoff, to ensure that such situations are minimized. It should be noted that there are practical issues, concerning present hardware and network limitations and standards, with synchronizing quickly that make rapid BTS power level synchronization a non-viable option at this

time due to present day technology limitations and industry accepted standards. It is thus believed that a methodology is needed that synchronizes slowly and at regular intervals. Consequently, appropriate power control parameter selection, as a function of the state of soft handoff, is believed to be a prime factor in preventing capacity degradation.

# SUMMARY OF THE INVENTION

**[0017]** The present invention comprises a method of improving the relative power level synchronization of all the BTSs communicating with an MS in a handoff mode through the use of at least one of 1) synchronizing all the handoff BTSs to the power level of the BTS having the best measured  $E_b/N_o$  (bit energy to noise density) of reverse link transmissions, 2) adjusting at least one of lower and upper limits of traffic channel gain of a BTS as a function of handoff mode and 3) adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode.

**[0018]** According to a first aspect of the present invention there is provided a cellular communication system incorporating fast forward power control and having at least 2 BTSs receiving reverse link transmissions from a MS (mobile station) comprising: measuring means, comprising a part of each BTS in the system, for measuring a parameter, at each of the BTSs receiving reverse link transmissions from said MS, of reverse link FPC (forward power control) bit stream transmissions from said MS; comparison means for periodically comparing the measured parameter to determine which BTS is receiving the most reliable FPC data wherein the BTS determined to be is receiving the most reliable FPC data is designated hereinafter as BTS(x); further comparison means for comparing the transmit power level of each BTS, other than BTS(x), with the transmit power level of BTS(x); and instructing means for instructing each BTS, other than BTS(x), whose power level differs from the transmit power level of BTS(x) by more than a predetermined value, to adjust the power level of transmissions to said MS to the level of BTS(x).

**[0019]** In a preferred embodiment, the parameter measured is  $E_b/N_o$  (bit energy to noise density).

**[0020]** In another embodiment, the cellular communication system further comprises: BSC checking means for determining the number of BTSs in a soft handoff mode with respect to a given MS; and means for adjusting at least one of the incremental FPC, RPC (reverse power control) parameters and the lower limit of traffic channel gain as a function of the number of BTSs in a soft handoff mode with respect to said MS.

**[0021]** In another aspect of the present invention there is provided a method of attempting to synchronize BTS (base transceiver station) transmit powers of a cellular communication system to an MS (mobile station) when there are at least 2 BTSs receiving reverse link

transmissions from said MS, the method comprising: measuring the  $E_b/N_o$  (bit energy to noise density) of reverse link FPC (forward power control) bit stream transmissions from said MS; periodically comparing the measured  $E_b/N_o$  to determine which BTS is receiving the most reliable FPC data; and instructing active set BTSs, other than the BTS determined to be receiving the most reliable FPC data, to adjust the power level of transmissions to said MS to the level of the BTS determined to be receiving the most reliable FPC data from said MS.

**[0022]** In a further aspect of the present invention there is provided a method of adjusting power control parameters in a cellular communication system, the method comprising: determining the number of BTSs (base transceiver stations) in a soft handoff mode with respect to a MS (mobile station); and adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

**[0023]** In yet another aspect of the present invention there is provided a method of adjusting power control parameters as part of a fast forward power control function of the BTSs (base transceiver stations) in a cellular communication system comprising the steps of: determining the number of BTSs in a soft handoff mode with respect to a given MS (mobile station); and adjusting a lower limit of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode.

**[0024]** In still yet another aspect of the present invention there is provided a cellular communication system incorporating fast forward power control and having at least 2 BTSs receiving reverse link transmissions from a MS (mobile station) comprising: checking means for determining the number of BTSs (base transceiver stations) in a soft handoff mode with respect to a MS (mobile station); and means for adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

**[0025]** In a further aspect there is provided a cellular communication system incorporating fast forward power control and at times having at least 2 BTSs receiving reverse link transmissions from a MS (mobile station) in a handoff mode comprising: checking means for determining the number of BTSs in a soft handoff mode with respect to a given MS (mobile station); and at least one of a) circuitry for adjusting a lower limit of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode; b) circuitry for adjusting the range between lower and upper limits of traffic channel gain of a BTS (base transceiver station) as regards communi-

cations with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0026] Exemplary embodiments of the present invention, and associated advantages, will now be described with reference to the accompanying drawings, in which:

FIGURE 1 is a block diagram of a cellular system used in describing the operation of the invention; FIGURE 2 is a flow diagram showing one of the inventive aspects of the present invention; and FIGURE 3 is a flow diagram showing two additional inventive aspects of the present invention.

### **DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT**

[0027] In FIGURE 1, an MTSO (mobile telephone switching office) block 10 is connected to a BSC (base station controller) block 12 as well as to a cloud labelled PSTN (public switched telephone network) 14. Within block 12 there is shown an SBS (selector bank subsystem) block 16. First and second BTS blocks 18 and 20 are connected to BSC 12 by communication links 22 and 24 respectively. An antenna 26 of BTS 18 is shown transmitting forward link signals to an MS (mobile station) 28. Reverse link, part of which is the power control channel signals, are being returned from MS 28 to the antenna 26. A further antenna 30 for BTS 20 is also shown sending forward link signals to MS 28 and receiving reverse power control channel signals. A dash line CPU (central processing unit) block 32 is included as an alternative computational that may be used instead of the BSC 12. This is presented with high speed links connected from each BTS involved. In such an implementation, a BTS may be designed to use a centralized CPU when such a unit is detected but use a BSC as a default processor. In FIGURE 2 a block 50 sets forth the requirement that all BTSs in a soft hand off mode with an MS estimate  $E_b/N_0$  (bit energy to noise density), over a period "N". At present, a data frame is generated over a time period of 20 ms (milliseconds) and thus comprises an appropriate time period for N. The process then continues with block 52 where each of the BTSs sends the  $E_b/N_0$  estimate and current transmit power to a central location such as BSC 12 of FIGURE 1. In a block 54, the BSC determines the "best BTS" which corresponds to BTS(x) having the best detected reverse link  $E_b/N_0$ . The process then proceeds to a decision block 56 where the absolute value of the incremental difference of the output power for each BTS with respect to BTS(x) is determined. If any BTS output powers incremental difference are found to exceed a predetermined threshold, these BTSs are put into a synchronization list in a block 58. In a block 60, each of the BTSs

in the list are instructed to use the power output of BTS(x) (the best) and the process returns to block 50. If none of the BTSs exceed the prescribed incremental difference, the process passes to block 62 and from there returns to block 50.

[0028] In FIGURE 3, the process typically remains in a decision block 73 while checking to determine if there is a change in soft handoff state for each MS with whom the BTS is in contact. This change may be from no handoff to a handoff mode as well as from a handoff involving a plurality of BTSs to a different plurality of BTSs. Upon detection of a change of state, the process proceeds to a decision block 75. If the MS is no longer in soft handoff, the process goes to block 77 where the lower limit on traffic channel power may be adjusted downward in accordance with the system configuration. In some circumstances it may be desirable to adjust the upper limit at the same time. This upper limit may be altered either up or down. However, typically the range between upper and lower limits would be increased when an MS is not in a soft handoff mode. A next block 79 causes an adjustment (normally an increase) in the setting of an "fpc" (forward power control) increment. As used in this document, "fpc" is the amount by which the BTS would increase/decrease its power. As an example this alteration might be 1.0, 0.5 or 0.25 db. Then, in a block 81, a message is sent to the MS requesting an adjustment (normally an increase) in the "rpc" (reverse power control) increment. By definition herein, "rpc" is the amount by which the MS would increase/decrease its power in a manner similar to that mentioned above. In IS95A, the forward link is punctured every power control group with the decision in the form of bits, upon which the MS can make a hard decision. This invention operates similarly in 3G for "rpc" and "fpc". 3G CDMA also allow the use of separate channels to carry this rpc/fpc information. The process then returns to decision block 73 to await any further changes in soft handoff state.

[0029] If, in block 75, a determination is made that the BTS is now in a soft handoff state with respect to a given MS, the process advances to a block 85. In block 85, the lower limit on traffic channel power may be raised depending upon the present service conditions and the state of handoff. The upper limit may also be adjusted as mentioned above in connection with block 77. In a block 87, the incremental value of "fpc" may be increased or decreased depending upon the direction of change detected in decision block 73 and the numbers of BTSs presently involved in a soft handoff mode with the MS. In a like manner, a message is sent to the MS to either increase or decrease the "rpc" increment as a function of the state of soft handoff.

[0030] As indicated supra, we have determined that to provide maximum improvement in a cellular system using fast forward power control while in a soft handoff mode, several adjustments need to be made to system parameters some of which are a function of the number

of BTSs involved in the soft handoff state.

[0031] As was explained briefly in the background section, the lack of power output level synchronization may cause loss of diversity of signals being sent from the BTS to an MS in a soft handoff mode. This is due to one or more BTSs changing transmission power levels inappropriately due to high reverse link bit errors. The end effect is a mismatch in transmitted power between the different BTSs. For instance, the strongest BTS in terms of instantaneous path loss may now be transmitting considerably less power than the other BTSs. Consequently, the other BTSs have to transmit even more power to make up for strong interference from the first BTS and loss of diversity.

[0032] Therefore, an approach to solving this problem is to ensure that the mismatch is never too large. For instance, if the lower limit on transmit power is kept at a very low value without maintaining synchronization of BTS transmit power levels, it may be determined by experiment or testing that all the forward transmit power levels are much higher than is the case in perfect synchronization cases. This is because one or more BTS transmit levels drift and remain at levels far below the other BTS transmit levels, creating the referenced loss of diversity situation. In fact, due to system set upper limit cap on the transmit power, the remaining BTSs are likely to be unable to meet the GOS, (i.e. the resulting FER is far above the typically desired 1% set point).

[0033] Thus the block 77 in FIGURE 3 provides the function of lowering the lower limit on traffic channel power in most situations where a BTS is not involved in a soft handoff mode with a given MS. This allows the MS get very close to the BTS without being overpowered by the BTS transmission signal and further allows the BTS to reduce its output signal to a low enough level that it will potentially increase its capacity to handle more traffic. The block 85, is the converse of block 77, in that normally the lower limit on the traffic channel of a BTS involved in a soft handoff mode will be raised so that it can not power down as far when the RPC messages in the reverse link are erroneously detected.

[0034] Although not specifically detailed above, it has further been determined that the step size of the FPC and RPC parameters have an affect on the stability of 3G CDMA systems when fast forward power control is implemented. The problem of too high an RPC when in soft handoff is already something that even affects existing IS-95A systems. When the MS is in high order soft handoff with the network, it is likely that one or more forward links are unreliable. In such situations, the MS may demodulate many of the reverse power control bits in error and actually start to power down. This is due to the way in which the rules have been established. As set forth in the standards, if even one power control bit is demodulated as down, the MS will power down (reduce the output transmission power level). It can only power up, if all the bits demodulated are demodulated as "power ups". Therefore, if the "rpc" increment is high,

for instance 1.0dB, then the MS could potentially power down in error very rapidly. Within 1 frame it may power down as much as 16dB. If the "rpc" is lower, i.e. 0.25dB, then the MS powers down 4 times slower. In one frame, it can only power down as much as 4dB.

[0035] Due to selection diversity provided by multiple soft handoff legs and antenna diversity at the BTS receiver, a higher "rpc" increment will not buy any radical performance improvement. In fact, maintaining a lower "rpc," step increment provides better reverse link reliability. In controlled tests, improved stability has been observed in IS95A type systems when the RPC step increment is lower in a soft handoff mode than a given RPC increment in a non-handoff mode.

[0036] Note that the reverse link stability ties directly with forward link stability when fast forward power control is operating. If the MS erroneously powers down by large amounts frequently, then the forward power control bits that it is supplying to the various BTSs are likely to go through higher bit error rates. This will affect the forward link stability. Once forward link stability is affected, it further affects reverse link quality. The end result is cyclical leading to degradation in system capacity.

[0037] During situations where the MS is in high orders of soft handoff with multiple BTSs, an even lower "fpc" increment has been determined to provide some benefit. If some of the BTSs make a wrong decision in demodulating the power control bit on the reverse link, they power down with a lower "fpc." Therefore, the differences in transmit power between the different BTSs do not gravitate apart as rapidly. A lower "fpc," does not substantially affect forward link capacity, because the MS is in a high order of soft handoff, hence the overall fading of the combined multipath is not as deep as a single path scenario. Therefore, power controlling with 0.25dB as opposed to 0.5dB does not affect capacity performance significantly. There is an added benefit to using small step such as 0.25dB in that a larger delay when synchronizing can be budgeted for. In other words a larger synchronization delay may be used because the BTS transmit powers do not move apart as rapidly.

[0038] As set forth above, it has been determined that when using a larger PRC step size, such as 0.5dB, the reverse link has a higher probability of becoming unstable during higher orders of soft handoff. Any such reverse link instability leads to forward link instability. Hence, the forward link degradation is not due to improper synchronization but rather to the unstable reverse link. In simulation tests where the BTS output power levels has been synchronized and 0.25dB step sizes have been used for "fpc" and "rpc", stability has been observed for all cases.

[0039] From the above, it is believed apparent that slow synchronization cannot, by itself, be used to solve the drifting apart of BTS transmit levels. Rapid synchronization can solve the drifting apart of BTS transmit levels, but at substantial cost to the network to actually

facilitate such a feature. This invention thus uses appropriate power control parameters to prevent a large drift such that slow synchronization can be applied to correct for any drift that does occur. In this manner, the benefits of fast power control are achieved through the use of appropriately chosen parameters for different handoff situations.

**[0040]** An algorithm for dealing with the above parameter adjustments is shown in FIGURES 2 and 3. The power control parameter adjustment as function of soft handoff is presented in FIGURE 2. FIGURE 3 deals with slow synchronization to prevent an inadequately power controlled base station from settling to the lower or upper limits on the forward link transmit power.

**[0041]** While FIGURE 3 is believed apparent from the above, it may be mentioned that, whenever the state of handoff changes, the parameters "fpc," "rpc," and the lower limit on traffic channel power are adjusted accordingly. If for instance the handoff increases to contain three or more BTSs, then a small step value for "fpc," and "rpc" such as 0.25dB may be used. If the soft handoff involves less than 3 BTSs, then a larger step value for "fpc," and "rpc" such as 0.5dB may be used. Similarly, the lower limit of traffic channel gain may be lowered in situations where there is no soft handoff, and increased when the MS is in soft handoff. The only message required, is one that instructs the MS to adjust "rpc."

**[0042]** Referring now to FIGURE 2, in block 50 it shows that the BTSs measure  $E_b/N_0$  over a period N, for instance 1 frame, and then transmit the measurement obtained along with the instantaneous traffic channel transmit power whenever it is in soft handoff as set forth in block 52 to a central location such as the BSC. Circuitry within the BSC, as shown in block 54, may be used to determine the BTS with the most reliable reverse link, hence the BTS which is likely to be the one most reliably power controlled. In decision block 56, the BSC compares the transmit levels of the other BTSs with this BTS(x) and based on the comparison determines if their transmit powers need to be adjusted. If any of the BTSs need to be adjusted, for instance maybe one or more BTSs are sitting at the lower limit, or upper limit, the process continues to blocks 58 and 60 where the BSC compiles a list and sends messages instructing these BTSs to use a new transmit level. This transmit level is the level that was sent to it by the most reliable BTS(x). In most situations, the BTSs will not need synchronization and the process returns through block 62 to block 50. However the part of the process set forth in FIGURE 2 is used as a safety check to ensure that BTSs are not sitting at the lower/upper limits of traffic channel transmit power.

**[0043]** It has been determined empirically, that, whenever the MS is not in soft handoff, the transmit power levels of a BTS, where a MS is receiving multipath signals due to topographic signals reflections, were much lower than occurred in single path cases. The

degree of transmit power level difference is dependent on the speed of movement of the MS. However, in cases of soft handoff, it has been determined that the transmit power level difference depends on the power control scheme employed. With the fast power control cases, the forward link power requirement in the two multipath case was higher when in 3 way soft handoff and above. This is due to dispersed power effects. These determinations were made with equipment having only three RAKE fingers at the MS. Three RAKE fingers are typical in an MS, hence much of the multipath cannot be used for maximal ratio combining though it contributes to interference. In the slow power control simulations, the gain during no handoff situations is so large, that it makes up for dispersed power effects in higher handoff situations. However, for two and some three way handoff, the diversity gain is larger than the dispersed power impacts, and so the required power is still marginally less in the two multipath case. The end result is a reduction in the forward link average transmit power requirements.

**[0044]** As a summary of the above, we have determined that the lower limit on traffic channel transmit power needs to be adequately set. Too low a value impacts capacity by necessitating the need for rapid synchronization. Too high a value also impacts capacity by resulting in higher than required transmit power levels for a given GOS. We have also determined that a lower value of power adjustment should be used when the MS is in high orders of soft handoff. This reduces the standard deviation of both the forward and reverse transmit power errors, thereby enabling stable performance of the system. In conjunction with the above, slow synchronization provides some marginal gain improvement. Accordingly, circuitry in the BSC is used to slowly rectify transmit power levels of some of the BTSs in soft handoff of the MS.

**[0045]** Although the invention has been described with reference to specific CDMA system embodiments, these descriptions are not meant to be construed in a limiting sense. Various modifications of the disclosed embodiments, as well as alternative embodiments of the invention, will become apparent to persons skilled in the art upon reference to the description of the invention.

## Claims

1. A cellular communication system incorporating fast forward power control and having at least 2 BTSs receiving reverse link transmissions from a MS (mobile station) comprising:

measuring means, comprising a part of each BTS in the system, for measuring a parameter, at each of the BTSs receiving reverse link transmissions from said MS, of reverse link FPC (forward power control) bit stream trans-

missions from said MS ;

comparison means for periodically comparing the measured parameter to determine which BTS is receiving the most reliable FPC data wherein the BTS determined to be is receiving the most reliable FPC data is designated hereinafter as BTS(x);

further comparison means for comparing the transmit power level of each BTS, other than BTS(x), with the transmit power level of BTS(x); and

instructing means for instructing each BTS, other than BTS(x), whose power level differs from the transmit power level of BTS(x) by more than a predetermined value, to adjust the power level of transmissions to said MS to the level of BTS(x).

2. The cellular communication system as claimed in claim 1 where the parameter measured is  $E_b/N_0$  (bit energy to noise density).

3. The cellular communication system of claim 1 or 2 further comprising:

BSC checking means for determining the number of BTSs in a soft handoff mode with respect to a given MS; and

means for adjusting at least one of the incremental FPC, RPC (reverse power control) parameters and the lower limit of traffic channel gain as a function of the number of BTSs in a soft handoff mode with respect to said MS.

4. A method of attempting to synchronize BTS (base transceiver station) transmit powers of a cellular communication system to an MS (mobile station) when there are at least 2 BTSs receiving reverse link transmissions from said MS, the method comprising:

measuring the  $E_b/N_0$  (bit energy to noise density) of reverse link FPC (forward power control) bit stream transmissions from said MS; periodically comparing the measured  $E_b/N_0$  to determine which BTS is receiving the most reliable FPC data; and instructing active set BTSs, other than the BTS determined to be receiving the most reliable FPC data, to adjust the power level of transmissions to said MS to the level of the BTS determined to be receiving the most reliable FPC data from said MS.

5. The method of claim 4, wherein the step of measuring  $E_b/N_0$  is performed either:

at each BTS listed in an active set of said MS;

or

at each of the BTSs receiving reverse link transmissions from said MS.

6. The method of claim 3 or 4 or 5 further comprising:

instructing each BTS, other than the BTS determined to be receiving the most reliable FPC data (hereinafter BT(x)), whose power level differs from the transmit power level of BTS(x) by more than a predetermined value, to adjust the power level of transmissions to said MS to the level of BTS(x).

7. A method of adjusting power control parameters in a cellular communication system, the method comprising:

determining the number of BTSs (base transceiver stations) in a soft handoff mode with respect to a MS (mobile station); and adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

8. The method of claim 7, wherein the power control parameters comprise part of a fast forward power control function of the BTSs.

9. The method of claim 7 or 8 wherein the adjusting function comprises reducing the incremental value of FPC as the number of BTSs in a soft handoff mode with respect to said MS increases.

10. The method of claim 7 or 8 or 9 further comprising:

lowering a lower limit of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) when said given MS is not in a handoff mode.

11. The method of any of claims 7 to 10, further comprising:

adjusting the range between upper and lower limits of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode.

12. The method of any of claims 7 to 11, further comprising:

raising a lower limit of traffic channel gain of a BTS (base transceiver station) as regards com-

munications with a given MS (mobile station) when said given MS is in a handoff mode as compared to the lower limit of the traffic channel gain of the BTS when said given MS is not in a handoff mode.

5

13. The method of any of claims 7 to 12, further comprising:

adjusting a lower limit of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode.

10

14. A method of adjusting power control parameters as part of a fast forward power control function of the BTSs (base transceiver stations) in a cellular communication system comprising the steps of:

determining the number of BTSs in a soft handoff mode with respect to a given MS (mobile station); and

20

adjusting a lower limit of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode.

25

15. A cellular communication system incorporating fast forward power control and having at least 2 BTSs receiving reverse link transmissions from a MS (mobile station) comprising:

30

checking means for determining the number of BTSs (base transceiver stations) in a soft handoff mode with respect to a MS (mobile station); and

35

means for adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

40

16. A cellular communication system incorporating fast forward power control and at times having at least 2 BTSs receiving reverse link transmissions from a MS (mobile station) in a handoff mode comprising:

45

checking means for determining the number of BTSs in a soft handoff mode with respect to a given MS (mobile station); and at least one of

50

a) circuitry for adjusting a lower limit of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a hand-

55

off mode;

b) circuitry for adjusting the range between lower and upper limits of traffic channel gain of a BTS (base transceiver station) as regards communications with a given MS (mobile station) as a function of whether or not said given MS is in a handoff mode.

17. A computer program element comprising computer program code means arranged to cause a controller to execute procedure to perform any of the methods steps of claims 4 to 14.

18. The computer program element of claim 17, embodied on a computer readable medium.

15



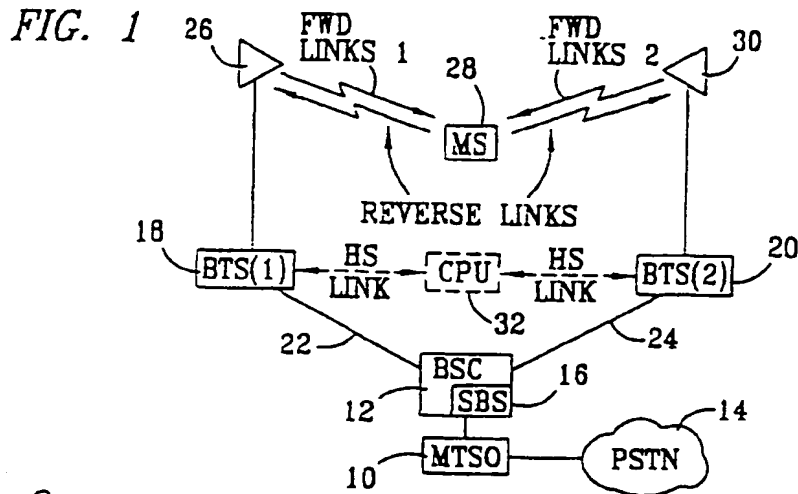
**FIG. 2**

FIG. 3

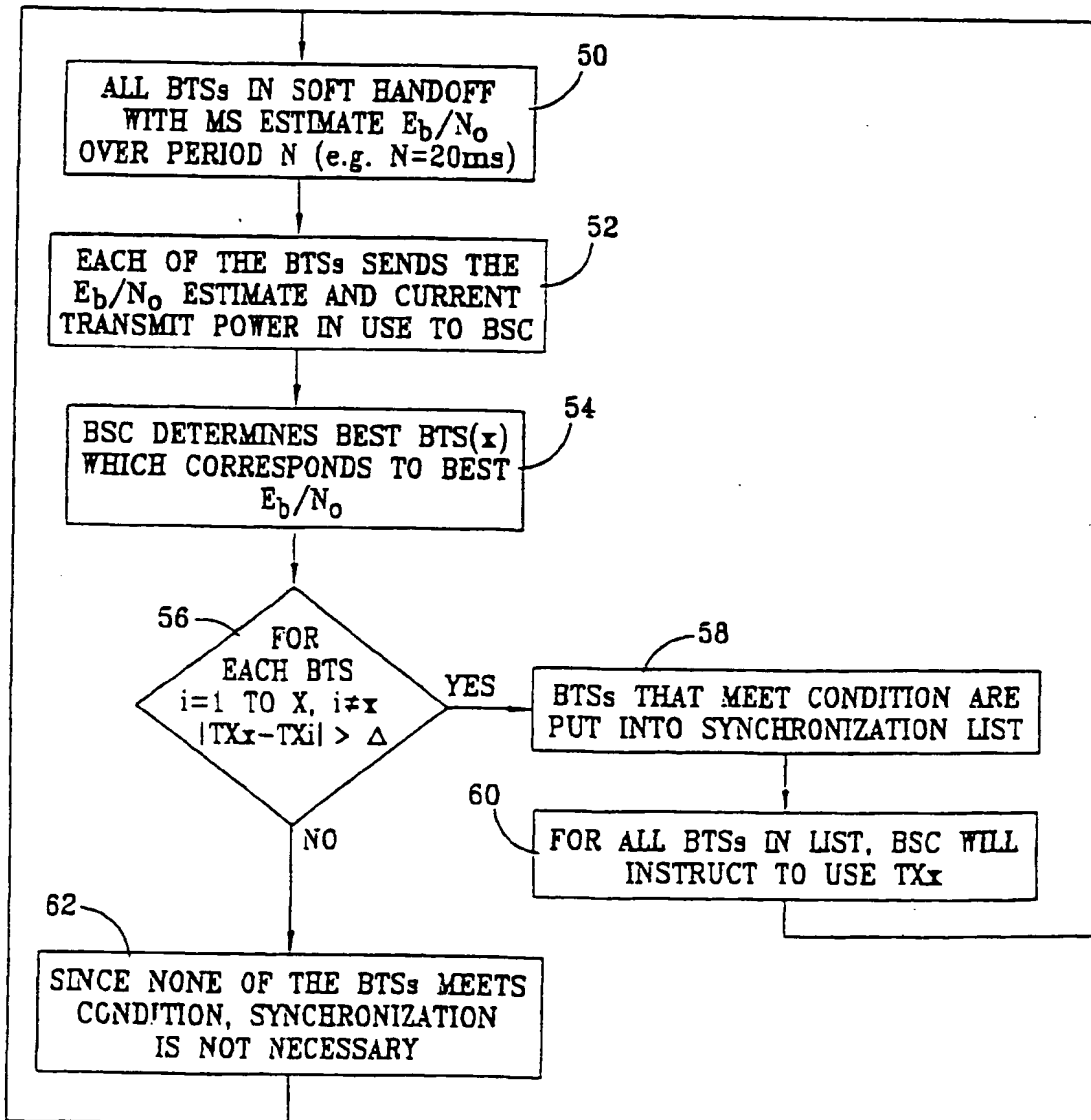

(19)

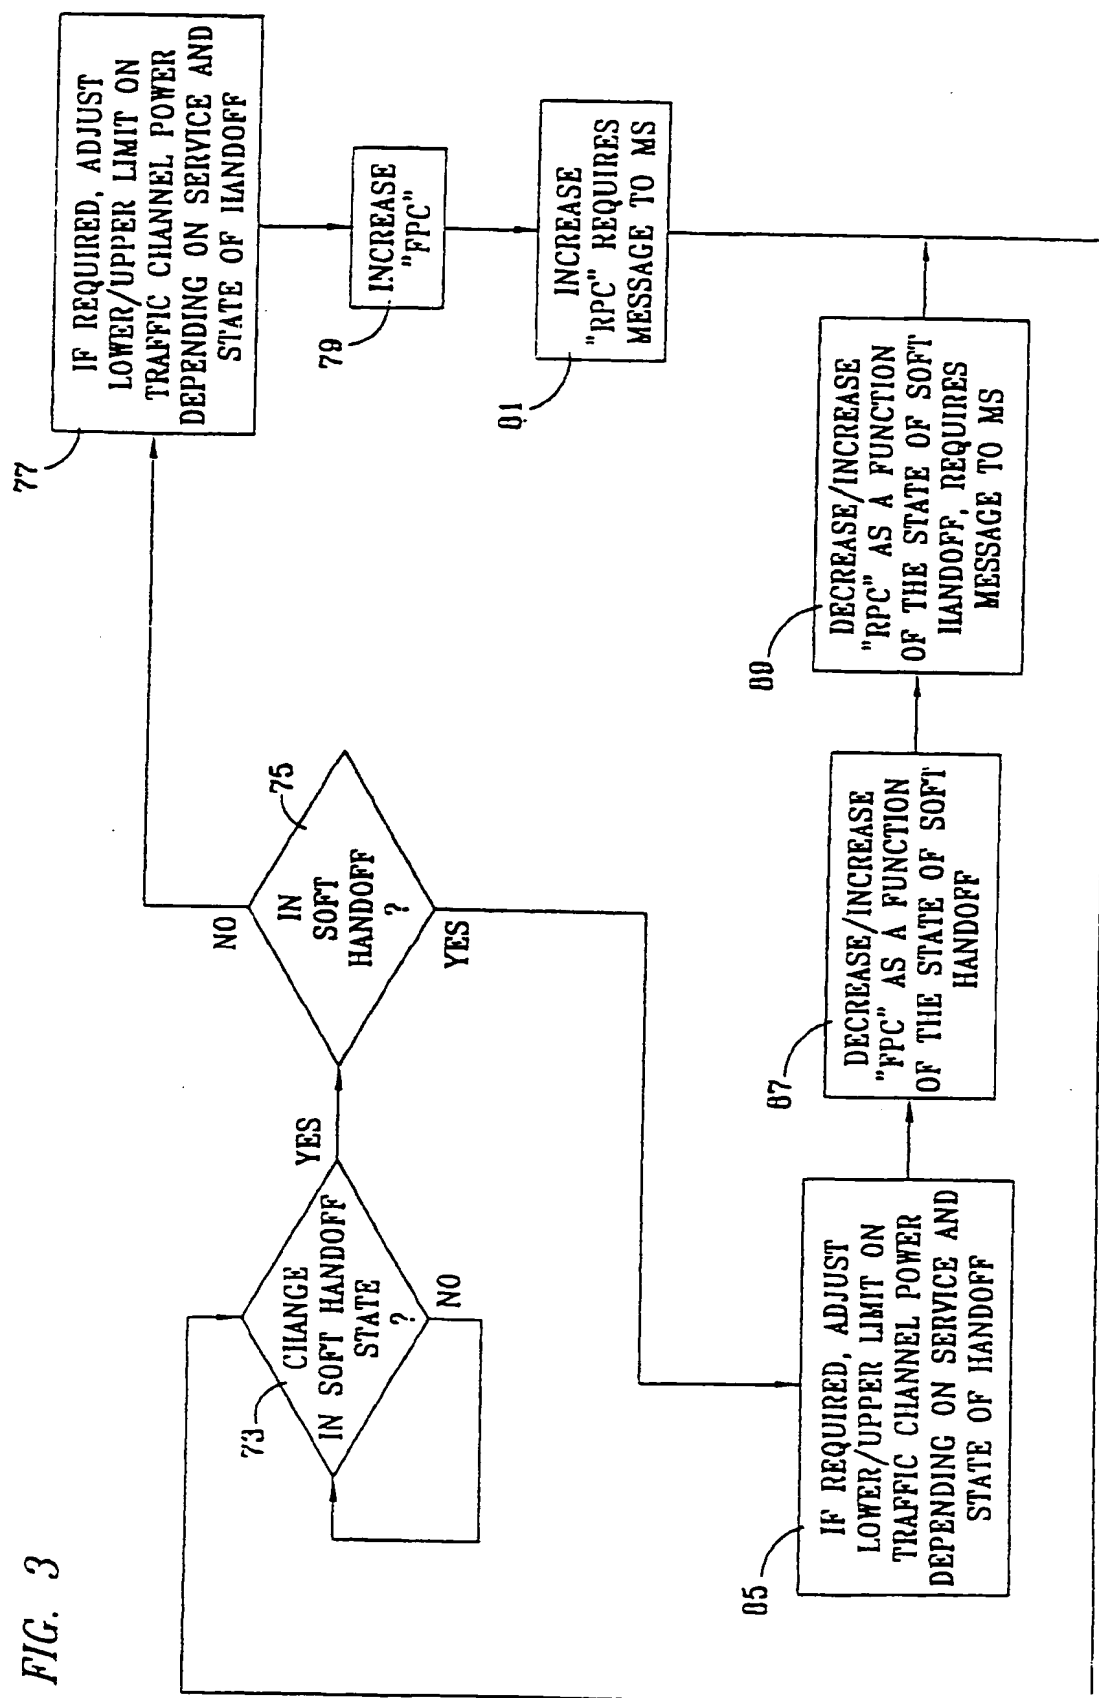

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 047 207 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
16.04.2003 Bulletin 2003/16

(51) Int Cl.7: **H04B 7/005**

(43) Date of publication A2:  
25.10.2000 Bulletin 2000/43

(21) Application number: **00303346.1**(22) Date of filing: **20.04.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Chheda, Ashvin**  
Piano, Texas 75025 (US)  
• **Jalali, Ahmad**  
San Diego, California 92191 (US)

(30) Priority: **22.04.1999 US 296974**


(74) Representative: **Loven, Keith James et al**  
**Loven & Co**  
Quantum House  
30 Tentercroft Street  
Lincoln LN5 7DB (GB)

(71) Applicant: **Nortel Networks Limited**  
Montreal, Quebec H2Y 3Y4 (CA)

**(54) Fast forward power control during soft handoff**

(57) Disclosed is an apparatus for and method of increasing the stability of a CDMA cellular system using fast forward power control. This is accomplished by improving the relative power level synchronization of all the BTSs communicating with an MS in a handoff mode through the use of at least one of 1) setting the power levels of any BTS other than the BTS having the best measured  $E_b/N_o$  (bit energy to noise density) of reverse link FPC (forward power control) bit stream transmissions from said MS, hereinafter BTS(x), to a power level which is a function of the power level of BTS(x), 2) adjusting at least one of lower and upper limits of traffic channel gain of a BTS as a function of whether or not said given MS is in a handoff mode and 3) adjusting at least one of the incremental FPC (forward power control) and RPC (reverse power control) parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

FIG. 2

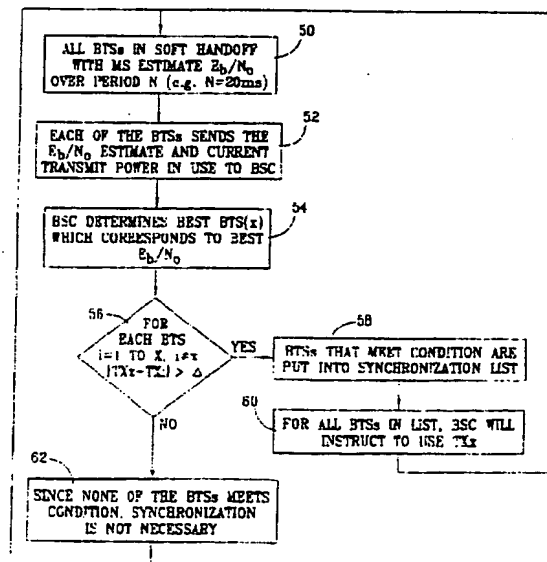

EP 1 047 207 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 3346

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL17)
X	WO 98 49785 A (QUALCOMM INC) 5 November 1998 (1998-11-05) * abstract * * page 27, line 24 - page 29, line 37 * * figure 1 *	1,2,4-6, 17,18	H04B7/005
X A	EP 0 697 799 A (MATSUSHITA ELECTRIC IND CO LTD) 21 February 1996 (1996-02-21) * column 2, line 25-58 * * column 6, line 49 - column 7, line 34 * * claim 1 *	7-9,15, 17,18 10-14,16	
X A	EP 0 645 940 A (NIPPON TELEGRAPH & TELEPHONE) 29 March 1995 (1995-03-29) * abstract * * column 11, line 25 - column 12, line 32 * * claim 1 *	7-9,15, 17,18 10-14,16	
X A	WO 98 59433 A (ERICSSON TELEFON AB L M) 30 December 1998 (1998-12-30) * abstract * * page 8, line 28 - page 10, line 23 *	7-9,15, 17,18 10-14,16	TECHNICAL FIELDS SEARCHED (InCL17) H04B
A	US 5 884 187 A (TIEDEMANN JR EDWARD G ET AL) 16 March 1999 (1999-03-16) * abstract * * column 14, line 31-42 *	1,2,4-6, 17,18	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 17 February 2003	Examiner Helms, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosures P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 52 (PAC01)



European Patent  
Office

Application Number

EP 00 30 3346

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

European Patent  
OfficeLACK OF UNITY OF INVENTION  
SHEET B

Application Number

EP 00 30 3346

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

## 1. Claims: 1-6, 17, 18

Independent claim 1 relates to a cellular communication system incorporating fast forward power control and having at least 2 BTSs receiving reverse link transmissions from a MS comprising measuring means, comprising a part of each BTS in the system, for measuring a parameter, at each of the BTSs receiving reverse link transmissions from said MS, of reverse link FPC bit stream transmissions from said MS, comparison means for periodically comparing the measured parameter to determine which BTS is receiving the most reliable FPC data wherein the BTS determined to be is receiving the most reliable FPC data is designated hereinafter as BTS(x), further comparison means for comparing the transmit power level of each BTS, other than BTS(x), with the transmit power level of BTS(x) and instructing means for instructing each BTS, other than BTS(x), whose power level differs from the transmit power level of BTS(x) by more than a predetermined value, to adjust the power level of transmissions to said MS to the level of BTS(x).

Independent claim 4 relate to the corresponding method.

## 2. Claims: 7-16

Independent claim 7 relates to a method of adjusting power control parameters in a cellular communication system, the method comprising determining the number of BTSs in a soft handoff mode with respect to a MS and adjusting at least one of the incremental FPC and RPC parameters as a function of the number of BTSs in a soft handoff mode with respect to said MS.

Independent claims 14-16 relate to similar subject-matter, all including the feature of determining the number of BTSs.

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 30 3346

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-02-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9849785	A	05-11-1998	US	6396867 B1	28-05-2002
			AU	753672 B2	24-10-2002
			AU	7099498 A	24-11-1998
			BR	9808986 A	08-08-2000
			CN	1254460 T	24-05-2000
			EP	0978170 A1	09-02-2000
			JP	2001522564 T	13-11-2001
			NO	995180 A	22-12-1999
			TW	396683 B	01-07-2000
			US	2002126739 A1	12-09-2002
			WO	9849785 A1	05-11-1998
			ZA	9803400 A	27-10-1998
EP 0697799	A	21-02-1996	JP	3037564 B2	24-04-2000
			JP	8065265 A	08-03-1996
			CA	2156454 A1	19-02-1996
			EP	0697799 A2	21-02-1996
			KR	199785 B1	15-06-1999
			US	5646937 A	08-07-1997
EP 0645940	A	29-03-1995	JP	2911090 B2	23-06-1999
			JP	7107033 A	21-04-1995
			DE	69422872 D1	09-03-2000
			DE	69422872 T2	15-06-2000
			EP	0645940 A1	29-03-1995
			US	5574983 A	12-11-1996
WO 9859433	A	30-12-1998	US	6104933 A	15-08-2000
			AU	7948898 A	04-01-1999
			EP	0997008 A2	03-05-2000
			JP	2002505819 T	19-02-2002
			WO	9859433 A2	30-12-1998
			TW	387176 B	11-04-2000
US 5884187	A	16-03-1999	AU	2323497 A	01-10-1997
			BR	9708430 A	03-08-1999
			CA	2248833 A1	18-09-1997
			CN	1218602 A	02-06-1999
			EP	0886985 A1	30-12-1998
			JP	2000509213 T	18-07-2000
			TW	424367 B	01-03-2001
			WO	9734439 A1	18-09-1997
			ZA	9702155 A	17-09-1997

EPO FORM P2459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82